

# **FERROZINC** HMG PAINTS



**HMG Paints**

Riverside Works, Collyhurst  
Road, Manchester, M40 7RU



# INTRO

## **FERROZINC WATER BASED RUST CONVERTER**

FERROZINC is a high-performance water-based rust converter making it ideal for application to areas unsuitable or difficult to shot blast or where complete removal of rust is not possible.

Ferrozinc is simple and easy to use. Simply wire brush, scrape or mechanically remove loose surface rust, apply single coat of Ferrozinc. A dramatic colour change from white to navy/black will show that the rust has been effectively neutralised.



# KEY FEATURES & BENEFITS

✓ Water based with little odour.

✓ Easy to use.

✓ Simply clean and remove loose debris, apply and watch the rust change to a black, full adhered surface ready for painting.


✓ No primer required.

✓ Overcoat treated area after three hours with most water based or oil-based coatings.

✓ Ideal for use on rusted areas on all ferrous metals, railings, fences, guttering, vehicles, machinery and other areas where blast cleaning is not possible.

✓ Tested against competitor brands.

# FURTHER DETAILS

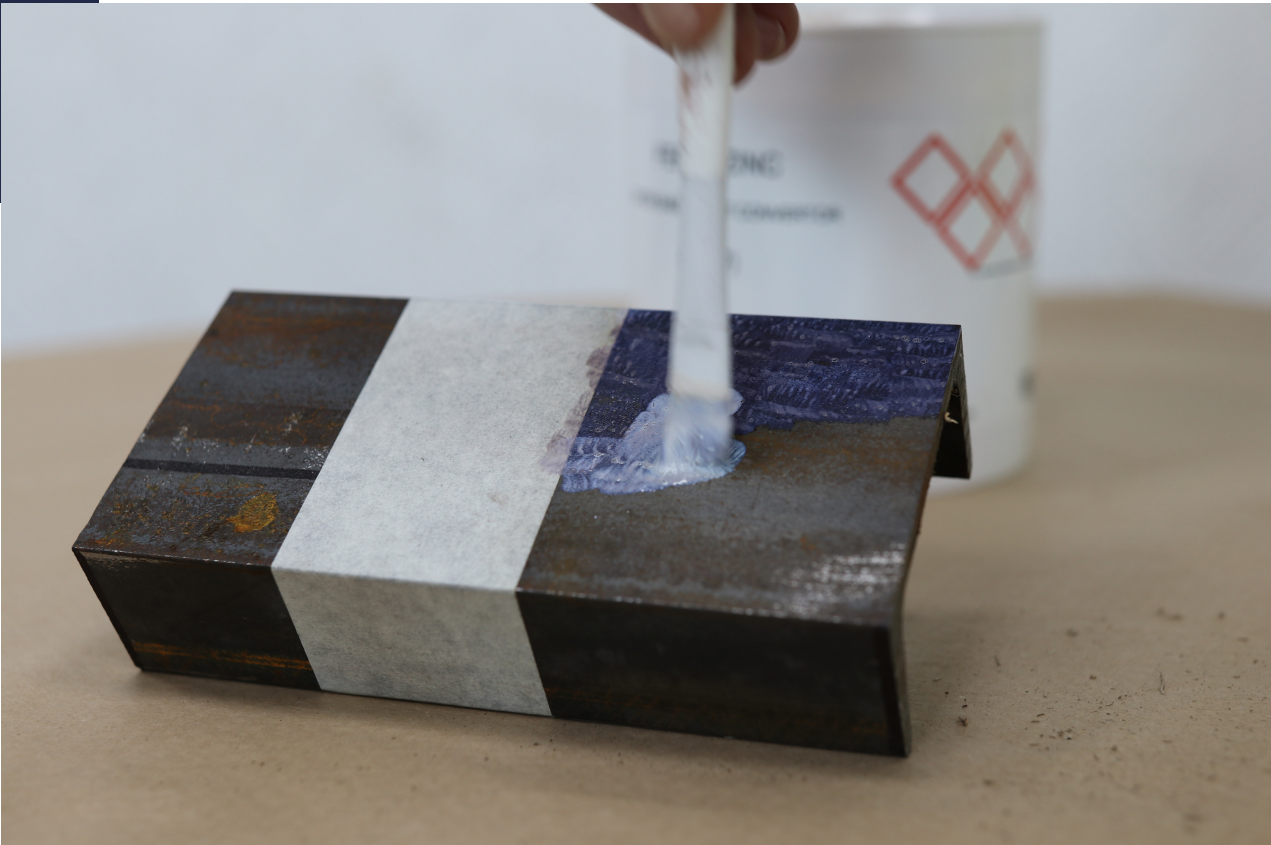

Ideal for structural steel, fences, iron railings, guttering, external ferrous metals, vehicle and machinery and marine situations due to application to damp surfaces that are difficult to completely dry e.g. light condensation or surface moisture, not for application during wet weather.

- Easy to apply
- Excellent long term conversion properties.
- Compatible with most coating systems including water/oil based, chlorinated rubber and epoxy systems.
- Extended testing proving to outperform many other rust conversion products.

All HMG Paints products are manufactured in Manchester, UK under the auspices of an ISO 9001 management system and are Made in Britain accredited.

HMG Ferrozinc is suitable for use on wire brushed or mechanically abraded metal surfaces which are free from heavy rust scale, grease and dirt.

# HOW TO USE



Clean and degrease using suitable HMG Prep Clean.

For heavily rusted areas, scrape or brush to remove loose contamination.



Best applied with short hard bristle brush with dabbing motion, can be applied with a short pile roller.

Apply in thin coat.



Dramatic colour change from white to navy/black shows that the rust has been effectively neutralised. Wipe surface to remove any residue.

Overcoat with applicable HMG product after 3 hours.

# TECHNICAL INFORMATION



**TDS**



Click the icon to download PDF.

**SDS**



Click the icon to download PDF.